

INSTALLATION INSTRUCTIONS

SHORT SWEEP ELECTRIC GAUGES

2650-1309-00



CAUTION FOR ALL GAUGE INSTALLATION

As a safety precaution, the +12V wire attached to the positive I (+) terminal of the gauge should be fused before connecting to the positive (+) output side of the ignition switch. We recommend using a 4 Amp, 3 AG fast-acting type cartridge fuse (Littlefuse® # 312 004 or an equivalent) inline between the power supply source and the I (+) terminal on the gauge.

NOTE: Some late model vehicles use electronic sensors in their pressure and temperature senders for engine control functions. Before removing the original sender, we recommend that you contact your automotive dealer to be sure no critical functions will be disrupted. With pressure gauges it is beneficial to add a T-fitting to install your new gauge and to keep the warning light operational. This allows you to monitor the pressure and still have a warning light to indicate emergency conditions.

NOTE: Disconnect negative (-) battery cable before installation.

CAUTION: Do not touch ignition wire to the sender (S) terminal on back of gauge or the sender may be damaged.


Mounting

These gauges can be mounted in-dash or in Auto Meter mounting solutions (panels, cups, pods, etc.). 2 1/8" diameter gauges mount in 2 1/8" hole. Fasten with brackets supplied as shown. (Hookup wire is required.) To assure proper functioning of this instrument, please read instructions thoroughly before installing.


Metric Adapters

If this product is to be installed on a vehicle requiring metric fittings, please contact your local Auto Meter dealer to purchase metric adapters. A complete listing of the fittings available can be found in our catalog or online at <http://www.autometer.com>

FRONT MOUNTING
(BOTTOM VIEW)



Wiring

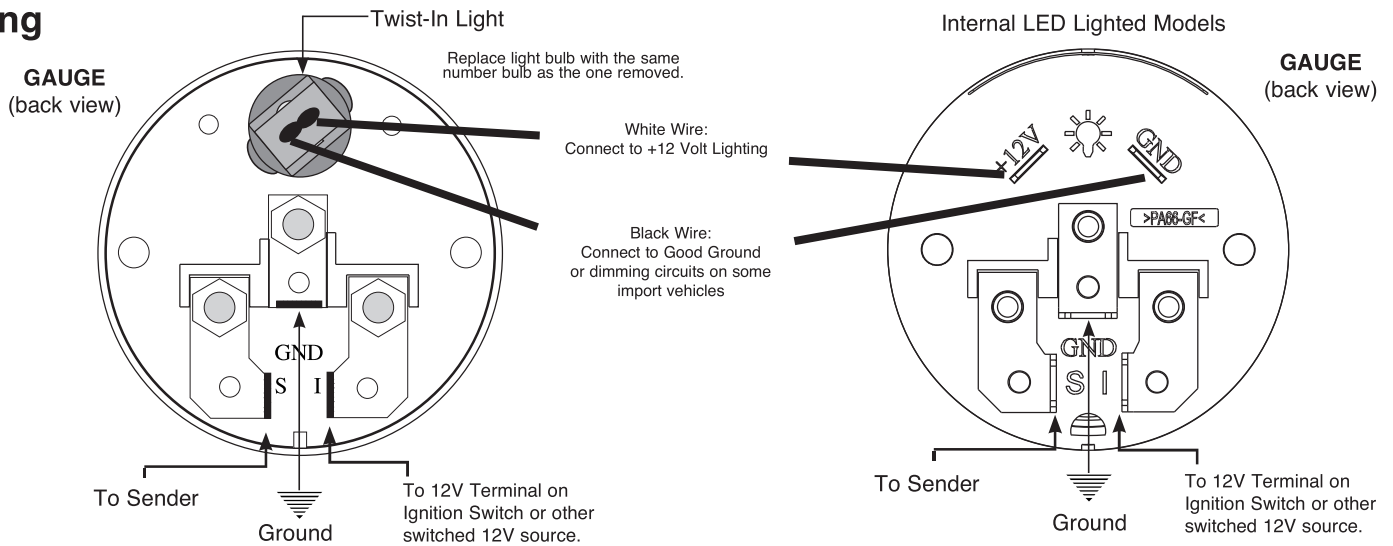


Temperature Gauges

1. Install temperature sender.
 - A. Water Temp: Install temperature sender (included). Purchase of additional fittings such as metric or hose adapters may be required.
 - B. Oil & Trans. Temp: Hole may have to be drilled and adapter nut (included) welded or brazed in pan. Be sure there is adequate internal clearance for nut and sender. Sender needs to be threaded into something that is grounded. If not, proper ground connections need to be made. May use #2260 weld on bung on steel pans (not included).
 - C. Cylinder Head Temp: Head must be drilled and tapped for 1/8" NPT hole. Sender needs to be threaded into something that is grounded. If not, proper ground connections need to be made. Be sure not to drill all the way through.
 - D. Diff. Temp: Install temperature sender in 1/8" NPT sender port on cover if available. If cover does not have a port, remove cover and drill and tap a 1/8" NPT hole or, drill and weld, or braze, adapter nut (included) in cover. Proper ground connections should be made by running ground wire from bolt in cover to chassis, being sure to leave enough slack in wire for suspension travel.
2. Route 18-gauge wire through firewall. If a new hole is drilled in the firewall a grommet is recommended. Connect one end to terminal post on temperature sender, and opposite end to sender (S) terminal on back of gauge.
3. Route 18-gauge wire from center terminal GND (-) on back of gauge to good ground near sender.
4. Connect wire from ignition switch to ignition (I) terminal on back of gauge.
5. Reconnect negative (-) battery cable.

USE TEFLON SEALING COMPOUND ON PIPE THREADS

TEMPERATURE SENDER

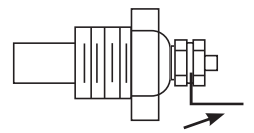


Note: Sender ground through threads

Pressure Gauges

1. Install sender into pressure port of appropriate type. **If unit is to be installed on a high vibration application such as a full race engine or engine capable of high RPM, it is strongly recommended that the sender be remote mounted to either the fenderwell or firewall, to insulate from vibration. Failure to remote-locate pressure senders on such an application could result in gauge failure and potential damage to vehicle and/or operator injury.** Braided stainless steel lines are sold separately by Auto Meter, and can be used to accomplish this. Sender features 1/8" NPT male fitting and comes with 1/4" NPT adapter. Sender needs to be threaded into something that is grounded. If not, or if remote relocation of sender is required, a ground connection to sender "body" may need to be made.
2. Route 18-gauge wire through firewall. If a new hole is drilled in the firewall a grommet is recommended. Connect one end to terminal post on pressure sender, and opposite end to sender (S) terminal on back of gauge.
3. Connect wire from center terminal GND (-) on back of gauge to good engine ground near sender.
4. Connect wire from ignition switch to ignition (I) terminal on back of gauge.
5. Reconnect negative (-) battery cable.

USE TEFLON SEALING COMPOUND ON PIPE THREADS



Note: Sender ground through threads

Fuel Level

Contact Auto Meter service if help is needed in determining your sender resistance.

Note: Before beginning installation, check to make sure stated resistance for gauge (listed on box) matches your sending unit value for proper operation.


	SENDER RESISTANCE (OHMS)	
	EMPTY	FULL
For most Ford vehicles to '86	73	8-12
Use 3262 Fuel level sender	240	33

NOTE: Failure to ground sender as in step 5 may result in inoperable gauge.

1. Gauge connects to fuel sender on fuel tank. Existing wires may be used, or route proper length of 18 gauge, wire from fuel tank to gauge. If a new hole is drilled in the firewall a grommet is recommended. Connect one end to terminal post on fuel level sender and the opposite end to the sender (S) terminal spade on back of gauge.
2. Connect ground wire from ground post on gauge to suitable chassis ground.
3. Connect wire from ignition switch to the positive I (+) terminal on the back of gauge. See figure right.
4. Reconnect negative (-) battery cable.
5. Be sure that body or mounting flange of sender is grounded to suitable chassis ground.

Voltmeter

1. Using 18 gauge wire, route one length through firewall. If a new hole is drilled in the firewall a grommet is recommended. Attach one end to the negative GND (-) spade terminal on back of gauge, and the opposite end to a good engine ground. See illustration at right.
2. Attach one length of wire to the positive I (+) terminal on back of gauge and opposite end to 12V terminal on ignition switch or other 12V power source.
3. Reconnect negative (-) battery cable.

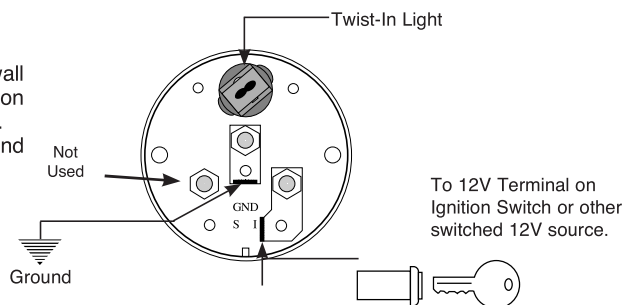

Questions?

If you have questions regarding the operation or installation of your instrument(s), please contact Auto Meter Technical Service at 815-899-0801.

You may also email us at service@autometer.com.

Additional information can also be found at <http://www.autometer.com>

SERVICE

For service send your product to Auto Meter in a well packed shipping carton. Please include a note explaining what the problem is along with your phone number. Please specify when you need the product back. If you need it back immediately mark the outside of the box "RUSH REPAIR," and Auto Meter will service product within two days after receiving it. (\$10.00 charge will be added to the cost of "RUSH REPAIR.") If you are sending product back for Warranty adjustment, you must include a copy (or original) of your sales receipt from the place of purchase.

12 MONTH LIMITED WARRANTY

Auto Meter warrants to the consumer that this product will be free from defects in materials and workmanship for a period of twelve (12) months from the date of the original purchase. Products that fail within this 12 month warranty period will be repaired or replaced at the manufacturer's option to the consumer, when determined by the manufacturer that the product failed because of defects in material or workmanship. This warranty is limited to the repair or replacement of parts in the instrument and the necessary labor done by the manufacturer to affect the repair or replacement of the instrument. In no event shall this warranty exceed the original purchase price of the instrument, nor shall the manufacturer be responsible for special, incidental or consequential damages or costs incurred due to failure of this product. Warranty claims to the manufacturer must be transportation prepaid and accompanied with dated proof of purchase. This warranty applies only to the original purchaser of product and is non-transferable. All implied warranties shall be limited in duration to the said 12 month warranty period. Breaking the meter seal, improper use or installation, accident, water damage, abuse, unauthorized repairs or alterations voids this warranty. The manufacturer disclaims any liability for consequential damages due to breach of any written or implied warranty on all products made by the manufacturer.

FOR SERVICE CONTACT: AUTO METER PRODUCTS Inc. 413 W. Elm St., Sycamore, IL 60178 USA (815)899-0801 or

Email us at service@autometer.com