

7929 Lincoln Ave. Riverside, CA 92504
Phone: 951.689.ICON Fax: 951.689.1016

PART #	DESCRIPTION
61500	05-10 FSD 4 LINK KIT

COMPONENTS INCLUDED	
(1) 164500 05-10 FSD 4 LINK FRAME BRACKET KIT (61500 BOX 1 OF 3) (1) 164501 05-UP FSD UPPER LINKS (61500/61550 BOX 2 OF 3)	(1) 164502 05-UP FSD LOWER LINKS (61500/61550 BOX 3 OF 3)
HARDWARE INCLUDED	
164500 (BOX 1 OF 3)	
(1) 61500H 05-10 FSD 4 LINK HARDWARE KIT	(2) 164011 05-10 FSD 4 LINK FRAME BRACKET
164501 (BOX 2 OF 3)	
(2) 164013 UPPER LINK WELDMENT (4) 167018 HEIM SPACER COM 16 X .750 X 2.800	(2) 295501 COM 16T BEARING (2) 605945 WHT-175 SPIRAL RETAINING RING
164502 (BOX 3 OF 3)	
(2) 164012 LOWER LINK WELDMENT (2) 167014 L/R ADJUSTER SLEEVE (4) 167017 HEIM SPACER JMI6T X .750 X 2.80	(2) 295510 JMI6T 1-14 RH ROD END (4) 605145 3/8-16 X 1.000 12 PT BOLT
61500H HARDWARE KIT	
(4) 605145 3/8-16 X 1.000 12PT CAP SCREW (8) 605200 7/16-14 X 1.500 BOLT (8) 605220 7/16-14 NYLOCK NUT (16) 605230 7/16 FLAT WASHER (2) 605601 3/4-10 X 5.500 BOLT (2) 605602 3/4-10 X 5.000 BOLT	(4) 605603 3/4-10 X 1.000 BOLT (4) 605620 3/4-10 NYLOCK NUT (8) 605630 3/4 FLAT WASHER (4) 605631 3/4 SPLIT LOCK WASHER (2) 605925 PLASTIC PUSH IN CLIP - ABS HOLDER
TOOLS REQUIRED	
JACK JACK STANDS TORQUE WRENCH	5/8" SOCKET / WRENCH 1 1/8" SOCKET / WRENCH 15MM SOCKET / WRENCH 24MM SOCKET / WRENCH 27MM SOCKET / WRENCH
TECH NOTES	
N/A	



WARNING!
<p>** READ ALL INSTRUCTIONS THOROUGHLY FROM START TO FINISH BEFORE BEGINNING INSTALLATION! IF THESE INSTRUCTIONS ARE NOT PROPERLY FOLLOWED SEVERE FRAME, SUSPENSION AND TIRE DAMAGE MAY RESULT TO THE VEHICLE!</p> <p>** ICON VEHICLE DYNAMICS RECOMMENDS THAT YOU EXERCISE EXTREME CAUTION WHEN WORKING UNDER A VEHICLE THAT IS SUPPORTED WITH JACK STANDS.</p> <p>** ICON VEHICLE DYNAMICS RECOMMENDS ALL INSTALLTION TO BE PERFORMED BY A PROFESSIONAL SHOP/SERVICE TECHNICIAN. PRODUCT FAILURE CAUSED BY IMPROPER INSTALLATION WILL NOT BE COVERED UNDER ICON'S WARRANTY POLICY.</p>

INSTALLATION

- Using a properly rated jack, raise the front of the vehicle and support the frame rails with jack stands. Ensure the jack stands are secure and set properly before lowering the jack. NEVER WORK UNDER AN UNSUPPORTED VEHICLE. Remove the front wheels.
- Some models have a transfer case skid plate that must be removed first. Use a 15mm socket/wrench to loosen and then remove the nut clips from the frame.
- Support the front axle and radius arm with a jack, and unbolt the radius arm from the driver side using a 24mm and 27mm socket/wrench. Leave the passenger side radius arm attached to keep the axle from rotating.
- Position the 4-link bracket with the weld nuts into the stock radius arm pocket. The welded nuts will line up with the upper forward hole in the stock radius arm pocket. Loosely install two (605603) bolts with split lock washers (605631) into the 4-link brackets. [FIGURE 1]

FIG.1



5. Rotate the bracket up until it meets the frame and then line up the two bottom holes in the 4 Link bracket with the existing holes in the bottom of the frame. Install both (605200) bolts. [Torque to 50 ft-lbs] [FIGURE 2]

FIG.2

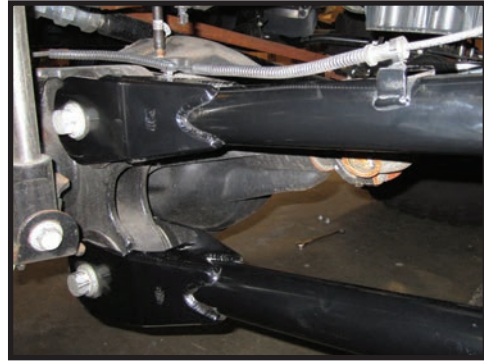


FIG.3

6. Install the new upper link (164501) on the frame bracket using the supplied (605601) bolt. Be sure the ABS mounting hole is facing up then install the axle side of the link using the stock bolt. Leave the bolts loose for now. [FIGURE 3]

7. Install the lower link (164502) on the axle using the stock radius arm bolt. This is the longer link with the rod end, collar, and double pinch bolts. First be sure the double pinch bolts are in, but loose so the adjustable collar can turn freely. Install the link on the frame/bracket using the supplied (605602) bolt. Swing the lower link into position and align the lowest 4-link frame bracket hole with the lower link. Insert the (605602) bolt with a washer (605630), and install a washer (605630) and nylock nut (605620) on the other side.

8. Leave the pivot bolts loose while repeating steps for the passenger side installation.

9. Now you should have both of the frame brackets and all four links installed on the vehicle. Using a 1 1/8" socket/wrench tighten all four 3/4" bolts [Torque to 260 ft-lbs]. Use a 24mm and a 27mm socket/wrench to tighten factory bolts at the axle. [Torque to factory spec]. [FIGURE 4]

FIG.4



10. Press the plastic tab (605925) into the outer hole on each upper link. Place the stock ABS wire into the plastic holder and close, locking the ABS wire in place.

11. Install the front wheels and lower vehicle to the ground. [Torque to factory spec]

12. Loosen the pinch bolts on the lower links. Adjust the length of the link as needed for alignment. Move the slit in the collars to match up with the slit in the link. Tighten the (4) 3/8" 12 point bolts by alternating back and forth between the bolts. [Torque to 35 ft-lbs]

13. Have the vehicle professionally aligned.

VERIFY ALL FASTENERS ARE PROPERLY TORQUED BEFORE DRIVING VEHICLE.

RETORQUE ALL NUTS, BOLTS AND LUGS AFTER 100 MILES AND PERIODICALLY THEREAFTER.

ICON VEHICLE DYNAMICS LIMITED LIFETIME WARRANTY

ICON Vehicle Dynamics warrants to the original retail purchaser who owns the vehicle on which the product was originally installed. ICON Vehicle Dynamics does not warrant the product for finish, alterations, modifications and/or installation contrary to ICON Vehicle Dynamics instructions. ICON Vehicle Dynamics products are not designed, nor are they intended to be installed on vehicles used in race applications, for racing purposes or for similar activities. (A "race" is defined as any contest between two or more vehicles, or a contest of one or more vehicles against the clock, whether or not such contest is for a prize). This warranty does not include coverage for police or taxi vehicles, race vehicles, or vehicles used for government or commercial purposes. Also excluded from this warranty are sales outside of the United States of America and Canada.

ICON Vehicle Dynamics' obligation under this warranty is limited to the repair or replacement, at ICON Vehicle Dynamics' discretion, of the defective product. Any and all costs of removal, installation or re-installation, freight charges and incidental or consequential damages are expressly excluded from this warranty. Items that are subject to wear are not considered defective when worn and are not covered.

ICON Vehicle Dynamics components must be installed as a complete kit as shown in our current application guide. Any substitutions or exemptions of required components will immediately void the warranty. Some finish damage may happen to parts during shipping and is not covered under warranty.

This warranty is expressly in lieu of all other warranties expressed or implied. This warranty shall not apply to any product that has been improperly installed, modified or customized subject to accident, negligence, abuse or misuse.

ICON VEHICLE DYNAMICS

PERFORMANCE SUSPENSION SYSTEMS AND SHOCK ABSORBERS

7929 Lincoln Ave. Riverside, CA 92504 Phone: 951.689.ICON Fax: 951.689.1016
www.iconvehicledynamics.com



FOLLOW US ON FACEBOOK!

